

Sertifikaat

REPUBLIEK VAN SUID AFRIKA

PATENT KANTOOR
DÉPARTEMENT VAN HANDEL
EN NYWERHEID



IB/2004/02926

Certificate

REPUBLIC OF SOUTH AFRICA

PATENT OFFICE
DEPARTMENT OF TRADE AND
INDUSTRY

Hiermee word gesertifiseer dat
This is to certify that

the documents attached hereto are true copies of Forms P2, P6,
and provisional specification and drawing of South African Patent Application
No. 2003/09466 in the name of Ewan Grant Chapman

Filed : 5 December 2003 ✓
Entitled : Dosing Device

**PRIORITY
DOCUMENT**


SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Geteken te
Signed at
PRETORIA

in die Republiek van Suid-Afrika, hierdie
in the Republic of South Africa, this

dag van
22 September 2004
day of

Registrar of Patents

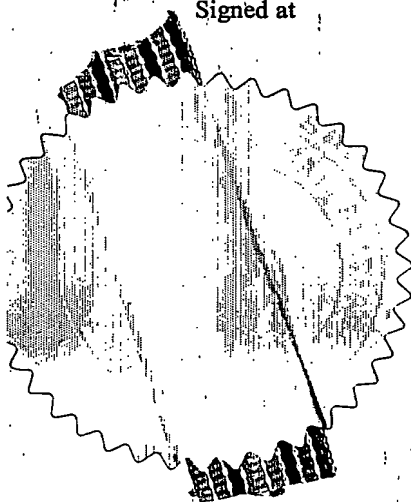

REPUBLIC OF SOUTH AFRICA			REGISTER OF PATENTS			PATENTS ACT, 1978		
OFFICIAL APPLICATION			LODGING DATE: PROVISIONAL			ACCEPTANCE DATE		
21	01	2003/9466	22	5 DEC 2003		47		
INTERNATIONAL CLASSIFICATION			LODGING DATE: COMPLETE			GRANTED DATE		
51			23					
FULL NAME(S) OF APPLICANT(S)/PATENTEE(S)								
71	EWAN, GRANT CHAPMAN							
APPLICANTS SUBSTITUTED:						DATE REGISTERED		
71								
ASSIGNEE(S)							DATE REGISTERED	
71								
FULL NAME(S) OF INVENTOR(S)								
72	EWAN, GRANT CHAPMAN							
PRIORITY CLAIMED		COUNTRY		NUMBER		DATE		
N.B. Use International abbreviation for country (see Schedule 4)		33	NIL	31	NIL	32	NIL	
TITLE OF INVENTION								
54	DOSING DEVICE							
ADDRESS OF APPLICANT(S)/PATENTEE(S)								
NO. 25 SEGOVIA, LOGON ROAD, BRYANSTON, 2021, SOUTH AFRICA								
ADDRESS FOR SERVICE						S & F REF		
74	SPOOR & FISHER, SANDTON					PA136410/P		
PATENT OF ADDITION NO.				DATE OF ANY CHANGE				
61								
FRESH APPLICATION BASED ON				DATE OF ANY CHANGE				

SPOOR & FISHER

REPUBLIC OF SOUTH AFRICA
PATENTS ACT, 1978
APPLICATION FOR A PATENT
AND ACKNOWLEDGEMENT OF RECEIPT
(Section 30 (1) – Regulation 22)

REPUBLIC OF SOUTH AFRICA
REVENUE

R 0060.00

The granting of a patent is hereby requested by the undermentioned applicant on the basis of the present application filed in duplicate

OFFICIAL APPLICATION NO.

21 01 2003/9466

REPUBLIC OF SOUTH AFRICA

PA136410/P

FULL NAME(S) OF APPLICANT(S)

71 EWAN, GRANT CHAPMAN

ADDRESS(ES) OF APPLICANT(S)

NO. 25 SEGOVIA, LOGON ROAD, BRYANSTON, 2021, SOUTH AFRICA

TITLE OF INVENTION

54 DOSING DEVICE

THE APPLICANT CLAIMS PRIORITY AS SET OUT ON THE ACCOMPANYING FORM P.2. THE EARLIEST PRIORITY CLAIM IS:

COUNTRY: NIL NUMBER: NIL DATE: NIL

THIS APPLICATION IS FOR A PATENT OF ADDITION TO PATENT APPLICATION NO.

21 01

THIS APPLICATION IS A FRESH APPLICATION IN TERMS OF SECTION 37 AND IS BASED ON APPLICATION NO.

21 01

THIS APPLICATION IS ACCOMPANIED BY:

- ☒ 1. A single copy of a provisional specification of 6 pages.
- ☒ 2. Drawings of 1 sheet.
- ☐ 3. Publication particulars and abstract (Form P.8 in duplicate).
- ☐ 4. A copy of Figure of the drawings (if any) for the abstract.
- ☐ 5. Assignment of invention.
- ☐ 6. Certified priority document.
- ☐ 7. Translation of the priority document.
- ☐ 8. Assignment of priority rights.
- ☐ 9. A copy of the Form P.2 and the specification of S.A. Patent Application No.
- ☒ 10. Declaration and power of attorney on Form P.3.
- ☐ 11. Request for ante-dating on Form P.4.
- ☐ 12. Request for classification on Form P.9.
- ☒ 13. Form P.2 in duplicate.
- ☐ 14. Other.

74 ADDRESS FOR SERVICE: SPOOR & FISHER, SANDTON

Dated: 5 December 2003

WJ
WJ

SPOOR & FISHER
PATENT ATTORNEYS FOR THE APPLICANT(S)

REGISTRAR OF PATENTS, DESIGNS,
TRADE MARKS AND COPYRIGHT

RECEIVED

2003-12-05

REGISTRATEUR VAN PATENTE, MODELLE,
HANDELSMERKE EN OUTEURSREG

REGISTRAR OF PATENTS

REPUBLIC OF SOUTH AFRICA
PATENTS ACT, 1978

PROVISIONAL SPECIFICATION

(Section 30(1) – Regulation 27)

OFFICIAL APPLICATION NO.

LODGING DATE

21	01	2003/9466
----	----	-----------

22	5 DECEMBER 2003
----	-----------------

FULL NAMES OF APPLICANTS

71	EWAN, GRANT CHAPMAN
----	---------------------

FULL NAMES OF INVENTORS

72	EWAN, GRANT CHAPMAN
----	---------------------

TITLE OF INVENTION

54	DOSING DEVICE
----	---------------

"DOSING DEVICE"**BACKGROUND TO THE INVENTION**

THIS invention relates to a dosing device.

In certain applications it is necessary to introduce one liquid into a flow of another liquid. A typical example is in commercial catering enterprises, such as hotels or restaurants, where it is desirable periodically to introduce liquid detergent into a flow of water which is to be used for washing up crockery, cutlery and so on.

Dosing devices for applications such as this have been proposed in the past and are widely used. However, one problem with known dosing devices is their inability to achieve proper mixing of the dosing liquid with the main liquid stream. Another problem is their inability to permit easy adjustment of the amount of dosing liquid which is introduced into the main stream.

It is an object of this invention to provide a novel dosing device for such applications.

SUMMARY OF THE INVENTION

According to the invention there is provided a dosing device comprising a conduit for conveying a main liquid stream and having a first inlet, an outlet and a venturi between the inlet and outlet for creating a relatively low pressure zone in the conduit when the main liquid stream flows from the first inlet to the outlet through the venturi, a second inlet through which a dosing liquid can be introduced into the low pressure zone to mix with the main liquid stream and form a mixed stream, a valve for controlling the introduction of the dosing liquid, and an aerator, located in the conduit downstream of the venturi, to receive air through the outlet and introduce it into the mixed stream.

The aerator serves the important functions of aerating the mixed stream and of promoting good mixture between the main liquid and the dosing liquid. The outlet may be spanned, downstream of the aerator, by a mesh gauze.

Further according to the invention, the second inlet includes an inlet spigot to which a hose leading from a source of the dosing liquid can be connected, and a flow control nozzle which is fitted releasably to the inlet spigot to control the flow of dosing liquid therethrough and over which the hose is connected to the spigot.

Still further according to the invention, the first inlet is threaded for connection to a faucet and the conduit has an outer surface formed with spanner-engagable flats to facilitate threaded connection of the first inlet to the faucet.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in more detail, by way of example only, with reference to the accompanying drawings.

In the drawings:

Figure 1 shows a cross-sectional view of a dosing device according to the invention; and

Figure 2 shows a cross-section at the line 2-2 in Figure 1.

DESCRIPTION OF THE ILLUSTRATED EMBODIMENT

The dosing device 10 seen in Figure 1 includes a main body 12 defining a conduit 14 having a first inlet 16 and an outlet 18. The first inlet 16 is internally threaded as shown for connection to a standard water faucet, typically a faucet serving a sink, basin or other receptacle in which washing up takes place in a commercial catering enterprise.

Between the first inlet 16 and the outlet 18 the cross-sectional area of the conduit is locally reduced to form a venturi throat 20. It will be understood that with a main liquid stream, i.e. a water stream, flowing from the inlet 16 to the outlet, the venturi is capable of generating a low pressure zone in the conduit. More is said about this subsequently.

The venturi is intersected by a second inlet 22 defined by an inlet spigot 24 to which, in use, a hose 26 extending from a source of a dosing liquid (not shown) is connected. In the example mentioned above, the dosing liquid is typically a detergent which is to be mixed with the main water stream to provide a mixed liquid suitable for washing up crockery, cutlery and so on. In practice, the other end of the hose (not shown) will extend into a container of the dosing liquid and is fitted with a non-return valve allowing flow of the dosing liquid to take place only in a direction towards the device 10.

Flow through the second inlet 22 is controlled by a flow control nozzle 28 fitted releasably as a friction fit into the end of the spigot 24. The nozzle has an internal orifice 29 through which flow of the dosing liquid must take place and may be of a commercially available type referred to as a dilution tip. The hose 26 fits over the dilution tip as illustrated.

The device 10 also includes a control valve indicated generally with the numeral 30. The valve 30 has a housing 32 in which a push-button 34 can slide. The inner end of the push-button carries an O-ring 36 and the push button itself is biased outwardly by a spring 40. When the push button is in the position seen in Figure 1, the conduit 14 can communicate directly with atmosphere through a passage 42 and a gap 44 between the button 34 and the housing 32. This prevents the generation of a low pressure in the conduit in the vicinity of the venturi. However, when the button is pushed in against the bias of the spring 40, such that the O-ring 36 seats on a surface 46 of the main body 12 which surrounds the passage 42, such communication is terminated and water flow through the venturi generates a low pressure zone in the conduit 14. This low pressure draws a dose of the dosing liquid from the source, through the hose 26, dilution tip 28 and inlet 22 into the conduit 14 where it mixes with the main water flow. The introduction of dosing liquid carries on as long as the button 34 is depressed. The arrangement may be such that the low pressure generated by the venturi is sufficient to hold the button in the inserted position as long as the main water flow is maintained.

Located in the conduit 14 downstream of the venturi throat is an aerator 50. In this embodiment, the aerator is of a conventional type, specifically a Neoperl aerator cascade insert of Class B flowrate. The aerator has a perforated, conical upper end 52 and a lower portion 54 formed with a series of narrow, longitudinal passages 55. Laterally extending slots 56 are formed in the side wall of the aerator between the upper end 52 and the lower portion 54 to admit air into the upper ends of the passages. The aerator 50 is a loose fit in the lower end of the conduit 14 and is held in place by a gauze mesh 58 and a circlip 60.

In use, with water flowing through the conduit 14 and the button 34 depressed such that low pressure is generated in the conduit 14, dosing liquid is drawn into the water flow to form a mixed stream which flows through the aerator 50. At the same time, air is drawn upwardly through the outlet 18, passes around the lower portion 54 of the aerator and enters the mixed flow through the slots 56 in the form of fine bubbles. The air accordingly mixes intimately with the mixed liquid flow in the narrow passages 55 through the aerator.

This has a dual advantage. Firstly, the mixed liquid flow is aerated and secondly, the introduction of the air bubbles into the liquid flow promotes thorough mixing between the main liquid, i.e. water and the dosing liquid, typically detergent.

Another advantage of the illustrated device 10 arises through the use of the dilution tip 28. It will be understood that for reasons of economy it is important to ensure that the correct amount of dosing liquid is added to the main liquid stream. The dilution tip 28 is one of a series of such tips which have different orifice sizes and which are accordingly designed to admit greater or lesser quantities of dosing liquid. Thus, for a given flow of main liquid it is possible to determine empirically which dilution tip 28 delivers the right amount of dosing liquid, and to install the correct dilution tip. The tip can of course be replaced as necessary to suit the particular circumstances. This is achieved quickly and simply merely by pulling the end of the hose off the inlet spigot 24, pulling the existing tip out of the end of the spigot, pushing a new tip into the end of the spigot and pushing the hose back over the tip and spigot.

Referring to Figure 2 it will be noted that the body 12 has opposing flat surfaces 62. These surfaces can be engaged by a spanner or like tool in order to screw the inlet 16 onto the threaded end of a faucet.

Although specific mention has been made of the use of the dosing device in commercial operations, it will be understood that it could equally well be used in domestic applications.

Dated this 5th day of December 2003



Spoor & Fisher

Applicant's Patent Attorneys

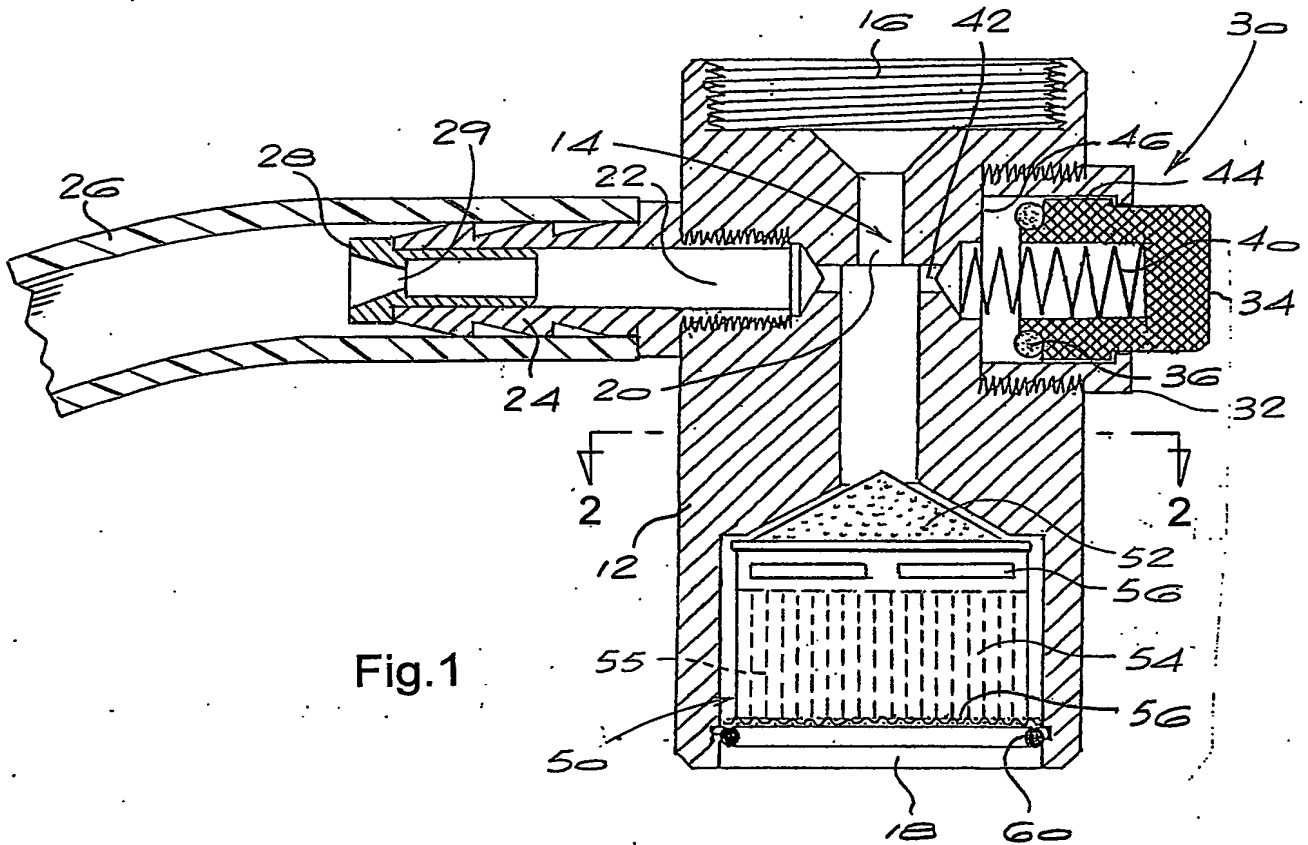


Fig.1

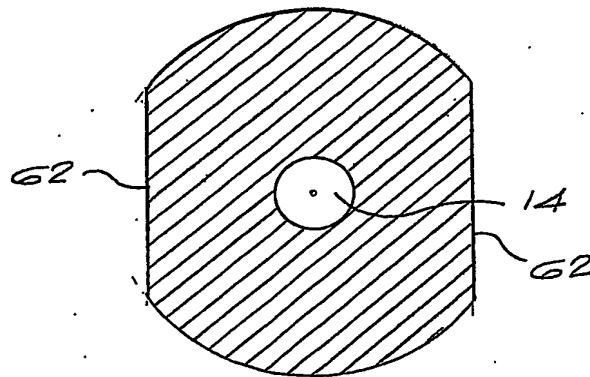


Fig.2